



Project No. 10: Highway 35 Near Hillcrest

Estimated Project Cost: \$1,479,000

Project Priority: Medium

Project Description

A total of 6,800ft of 8-in diameter waterline will be installed primarily along the west side of Highway 35, beginning at Nastasi Drive to the south and ending north of Hillcrest Road. 6,100ft of 8-in waterline will replace existing 4-in waterline and 700ft of new 8-in waterline will cross Highway 35 to add a new connection to the parallel 6-in waterline. The waterline will improve fire flows, redundancy, and distribution capacity in the central part of the District south of Booth Hill.

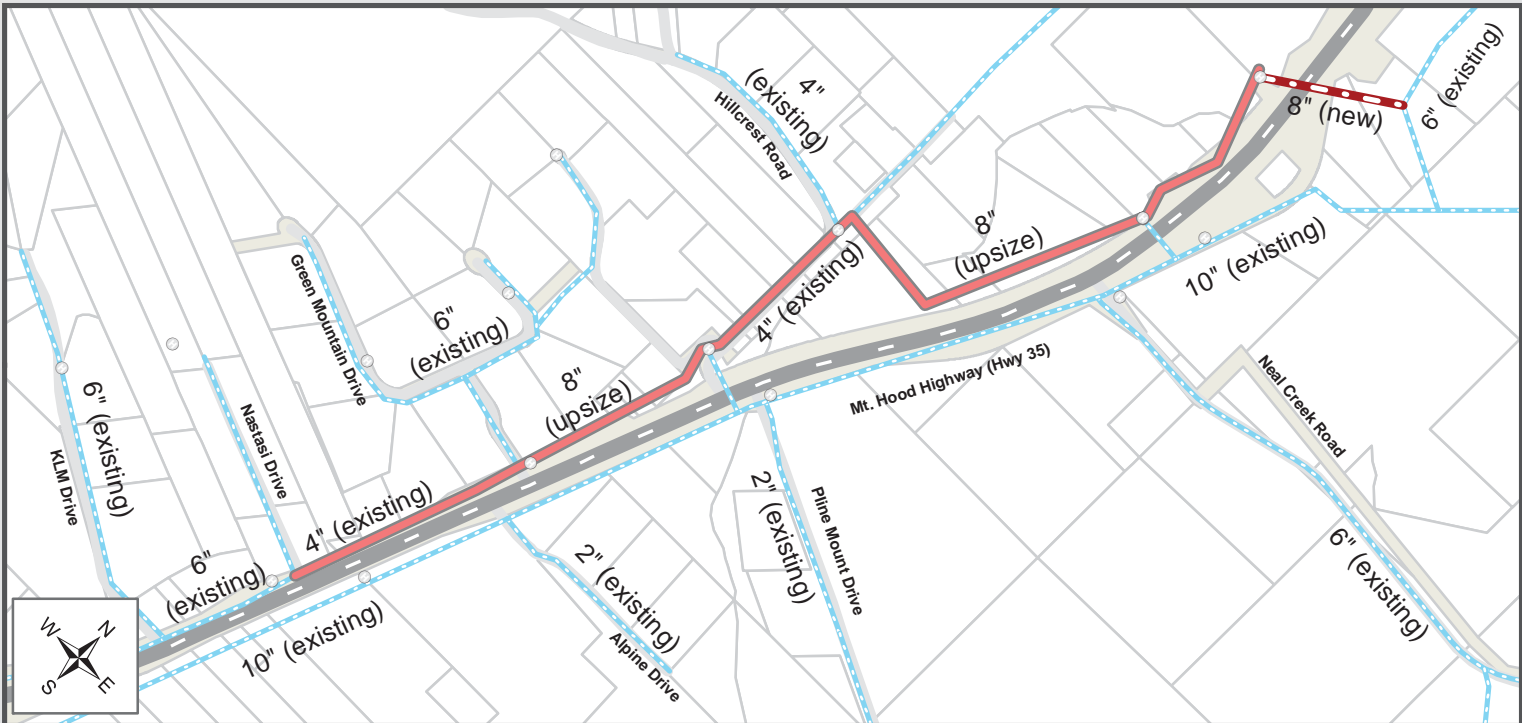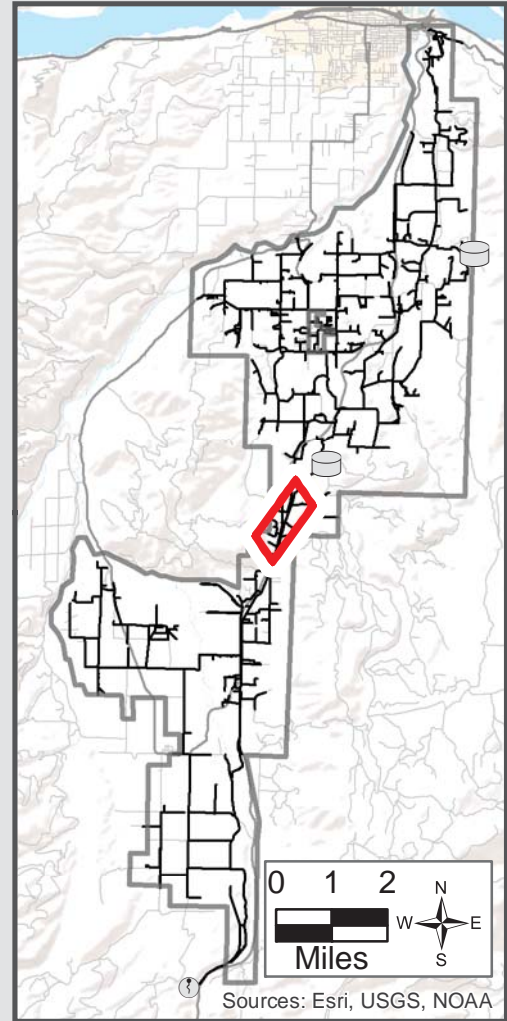

Upsized Waterline	Relief Valve	Crystal Spring	Highway/Road
New Waterline	Hydrants	Existing Reservoir	Property line
New PRV	Existing Reservoir	Existing Waterline	Water
New Reservoir	0 1,000 Feet		
PRV Existing			



Date: 11/4/2015
Document Name: 2015CIP_CutSheets