



# Project No. 13: Booth Hill to Odell

Estimated Project Cost: \$3,314,700

Project Priority: Medium

## Project Description

A total of 12,700ft of 12-in diameter waterline will be installed from Booth Hill Reservoir to Odell, replacing existing 8-in waterline. The upsized line will begin at the reservoir and follow Booth Hill Road, Masseur Grade Road, and Straight Hill Road, ending at Odell Highway. The upsized waterline will improve fire flows and distribution capacity to Odell and reduce high flow velocities through this section.

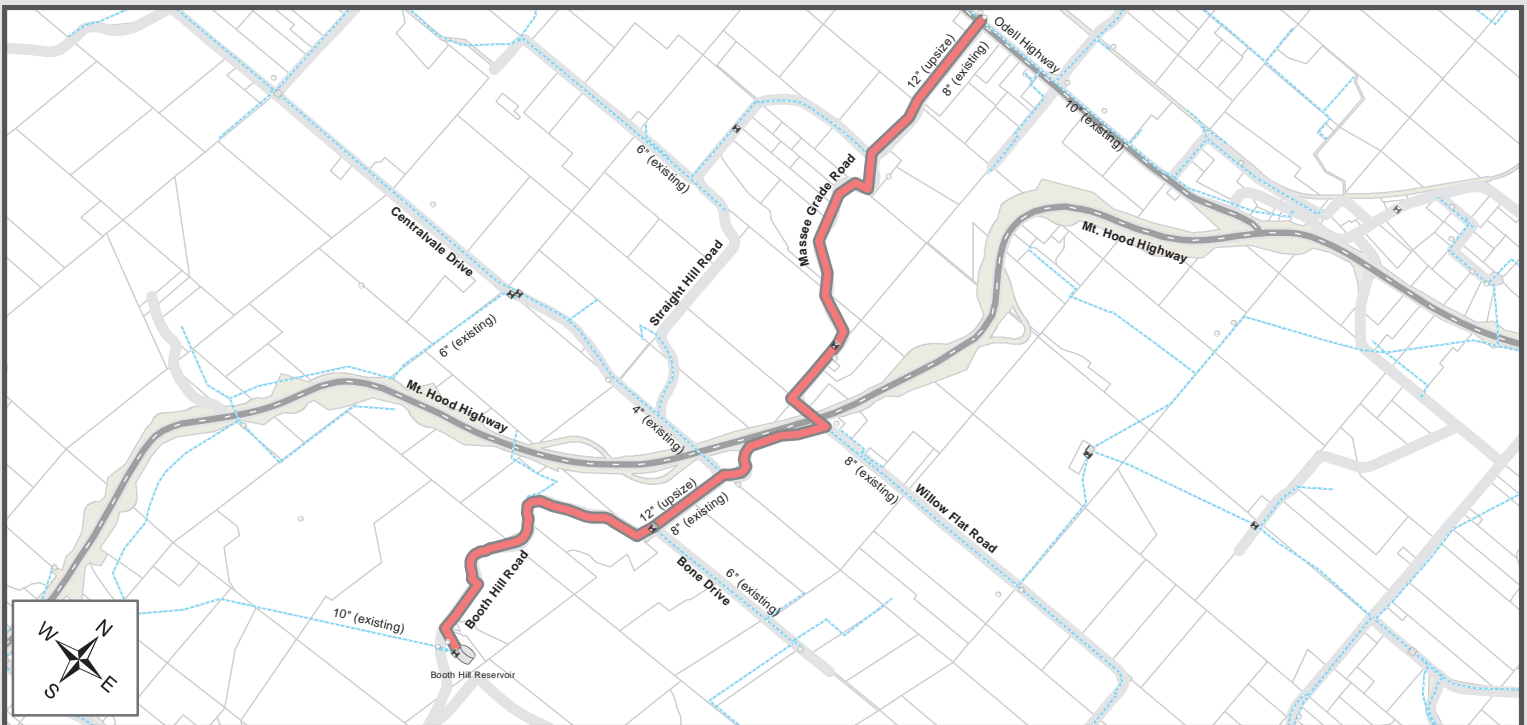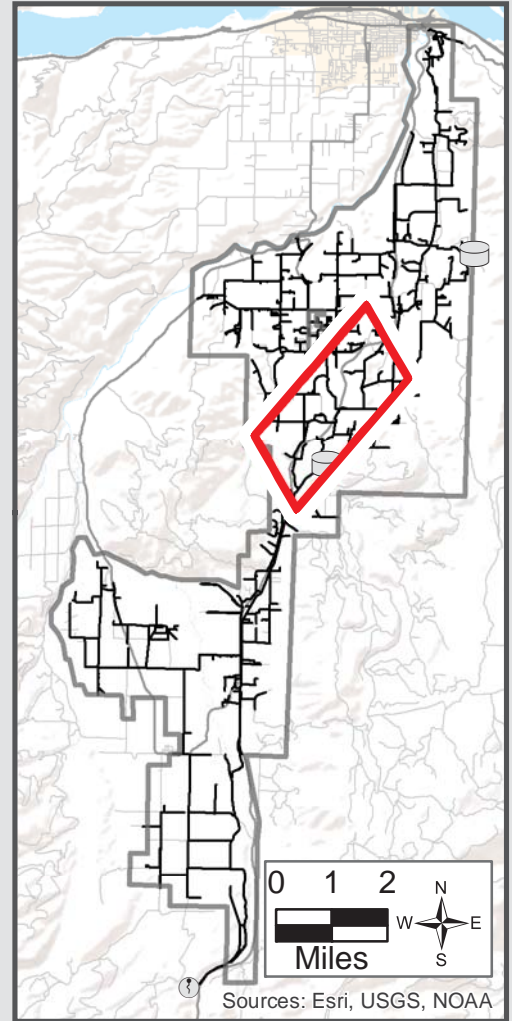

Upsized Waterline	Relief Valve	Crystal Spring	Highway/Road
New Waterline	Hydrants	Existing Waterline	Property line
New PRV	Existing Reservoir	Water	
New Reservoir			
PRV Existing			

0 1,000 Feet

