



Project No. 16: WyEast Road - Sylvester - Sylvester to Lippman

Estimated Project Cost: \$1,148,400

Project Priority: Low

Project Description

A total of 4,800ft of 10-in diameter waterline will be installed along WyEast Road, beginning at Sylvester Drive and ending at Lippman Road, replacing existing 4-in waterline. The upsized waterline will improve fire flows and distribution capacity to the west side of Odell and reduce high flow velocities through this section.

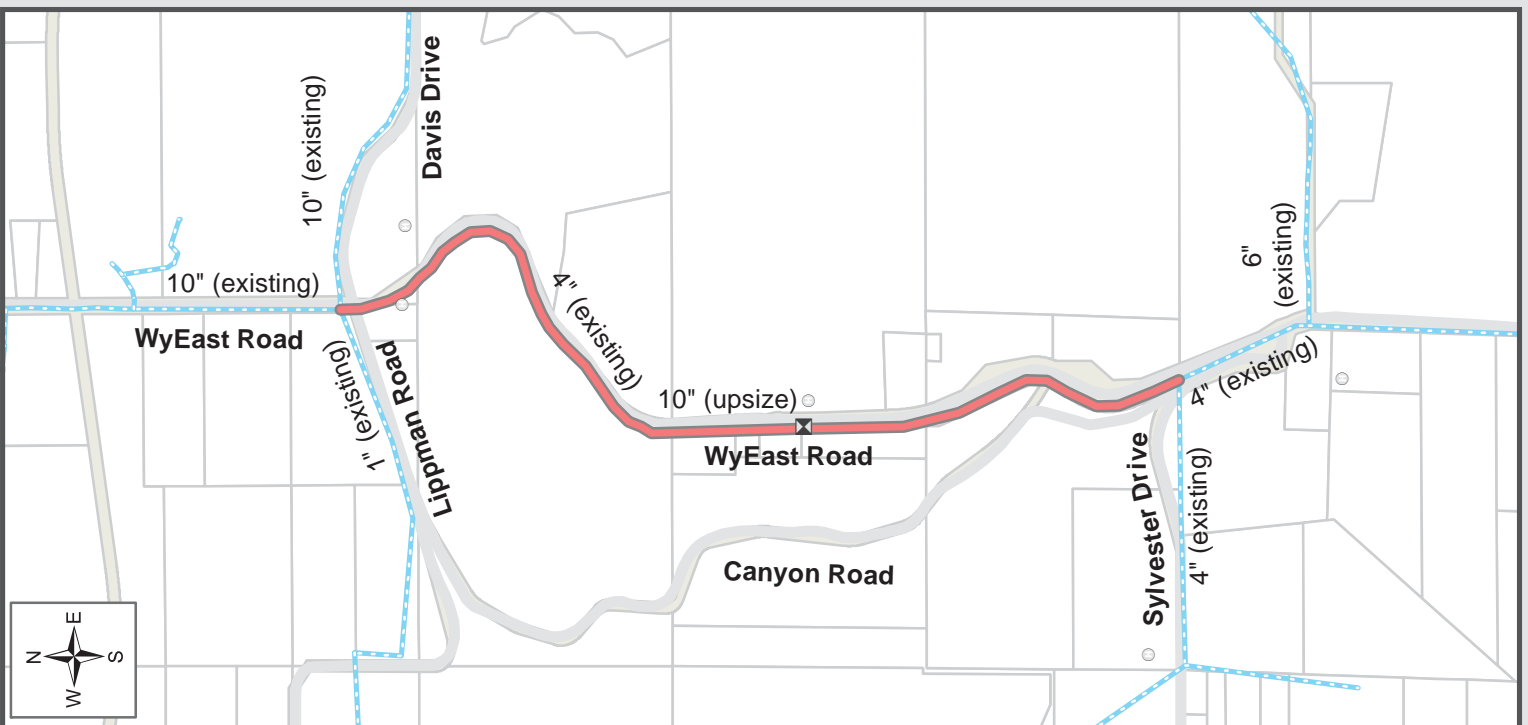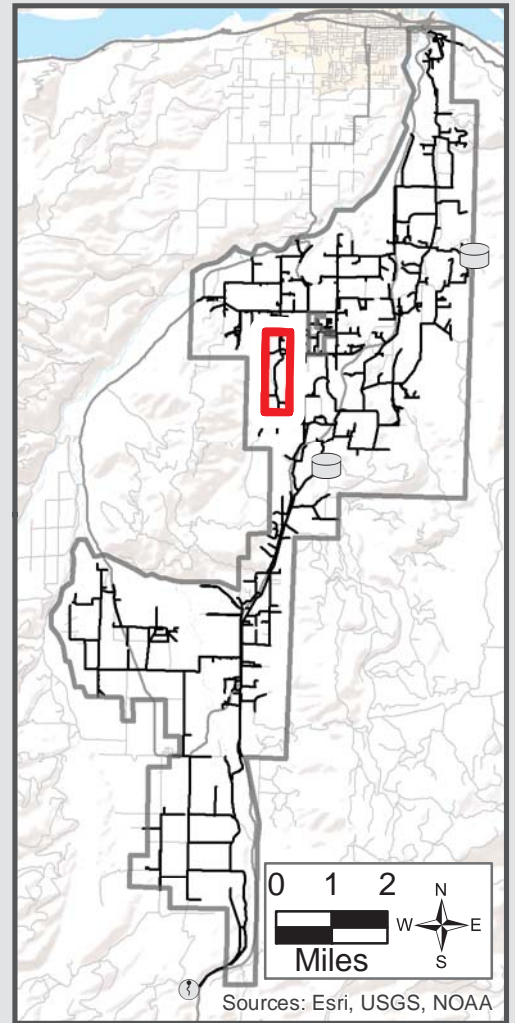

Upsized Waterline	Relief Valve	Crystal Spring	Highway/Road
New Waterline	Hydrants	Existing Reservoir	Property line
New PRV	Existing Reservoir	Existing Waterline	Water
New Reservoir	Existing Reservoir		
PRV Existing			

0 1,000 Feet

