



Project No. 24: Thomsen Road to Fir Mountain

Estimated Project Cost: \$2,131,500

Project Priority: Medium

Project Description

A total of 9,800ft of 8-in diameter waterline will be installed along Thomsen Road, beginning at Neal Creek Road and ending at Fir Mountain Road, replacing existing 4-in waterline. The upsized waterline will replace pipe at the end of its usable life and improve fire flows, redundancy, and distribution capacity to Pine Grove and the northern parts of the District.

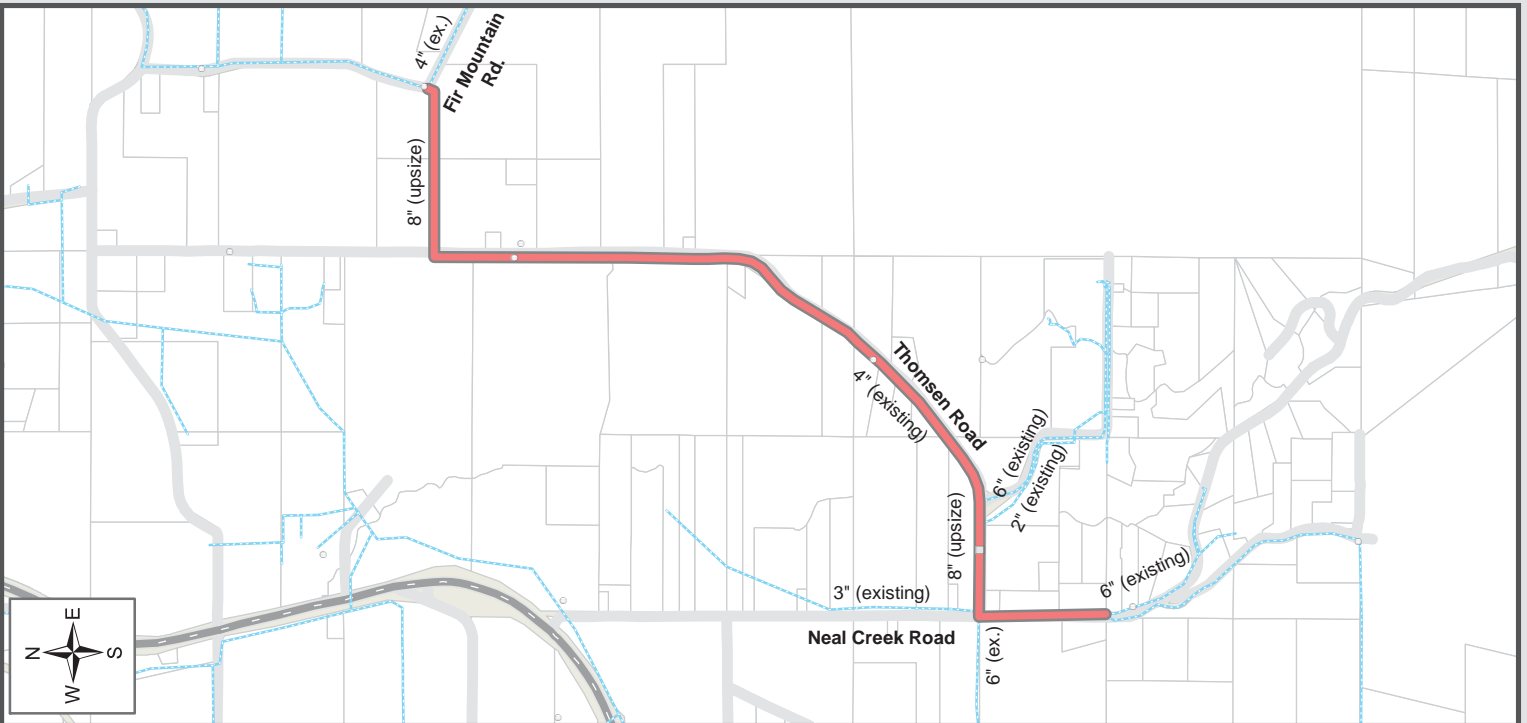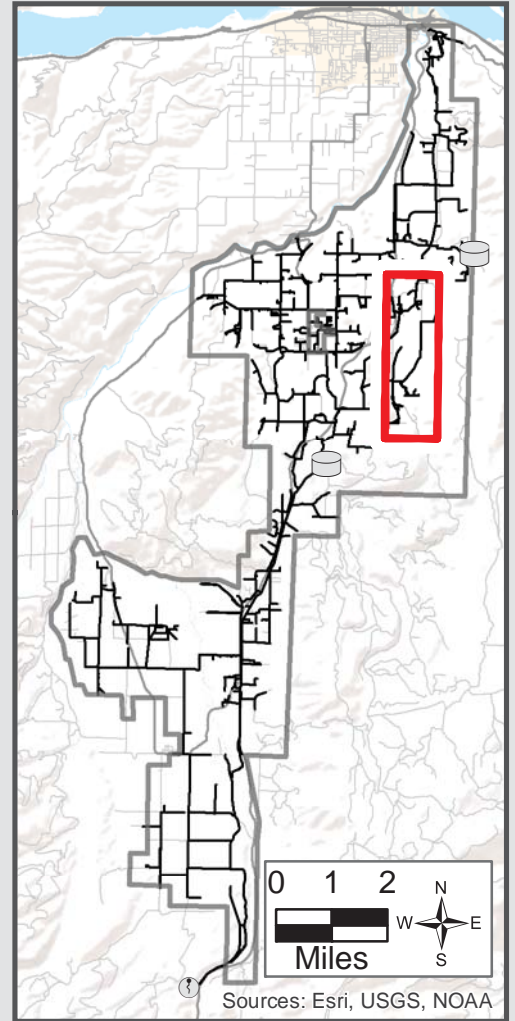

Upsized Waterline	Relief Valve	Crystal Spring	Highway/Road
New Waterline	Hydrants	Existing Reservoir	Property line
New PRV	Existing Reservoir	Existing Waterline	Water
New Reservoir	PRV Existing	0 1,000 Feet	

