



CIP 12: Booth Hill Road and Neal Creek Road - Highway 35 to Reservoir

Project Cost: \$3,001,500

Project Priority: Low

Project Description

Approximately 6,900 ft of new 8-in water line will be installed on Booth Hill Road, beginning at Highway 35 to the south and ending near Booth Hill Reservoir. Roughly 3,600 ft of 8-in water line will replace existing 4-in and 6-in water lines, and about 3,300ft of new 8-in water line will connect the upsized line to the existing 10-in water line that feeds Booth Hill Reservoir. This water line will improve redundancy and provide a secondary transmission line to Booth Hill Reservoir.

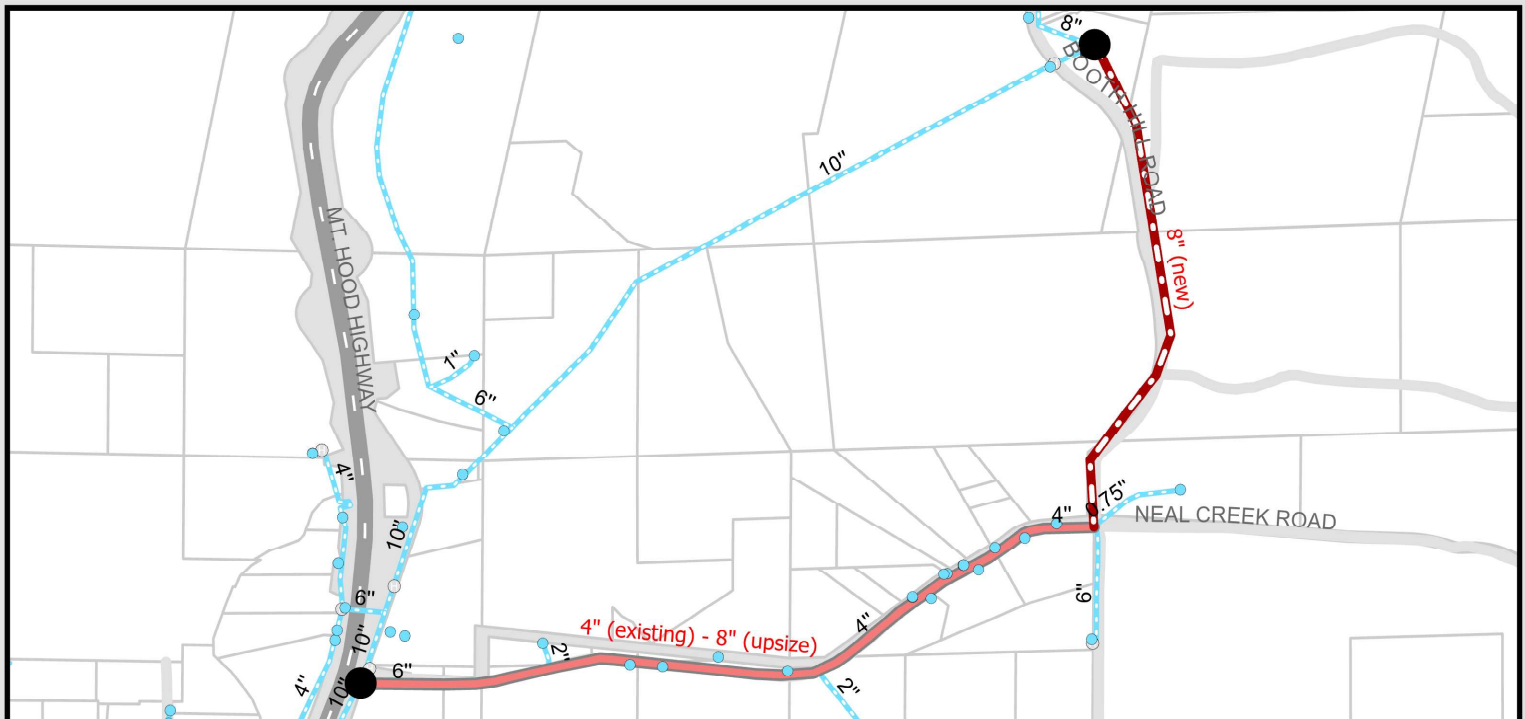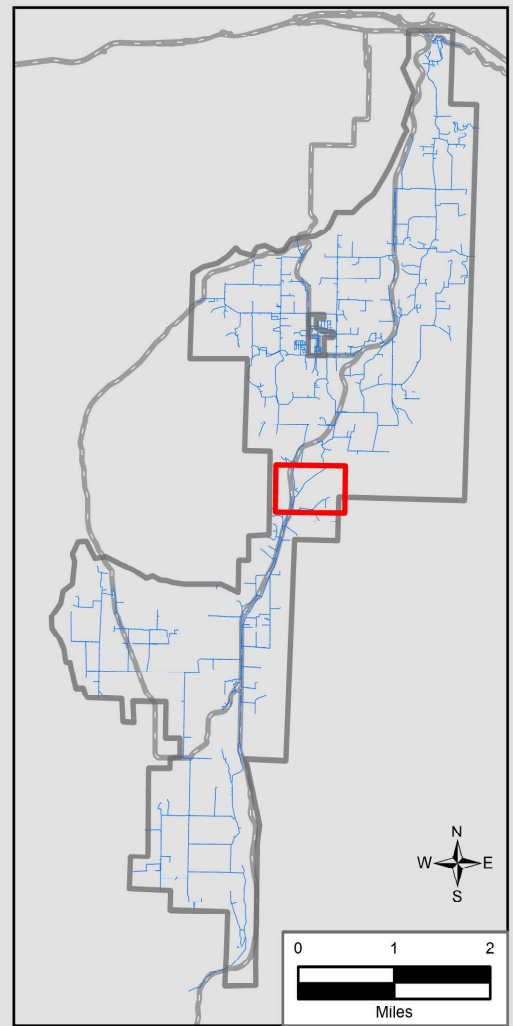

Upsized Waterline	Relief Valve	Crystal Spring	Highway/Road
New Waterline	Hydrants	Existing Reservoir	Property line
New PRV	Existing Reservoir	Existing Waterline	Water
New Reservoir		District Boundary	
PRV Existing			



Date: 8/28/2025



Default Folder: P:\K0\23\23817_CSWD_VMP\GIS3_CarboGraphic\CIP Out Sheets\Crystal Springs 2025\CIP Map Figures