



# CIP 15: Davis Drive - Stadelman Drive to Odell Highway

**Project Cost: \$1,366,625**

**Project Priority: Medium**

## Project Description

Approximately 2,900ft of 12-in water line will be installed on Davis Drive between Odell Highway and Stadelman Drive to replace the existing 8-in water line. The upsized water line will improve fire flows and distribution capacity within Odell, specifically increasing fire flows to the industrial area.

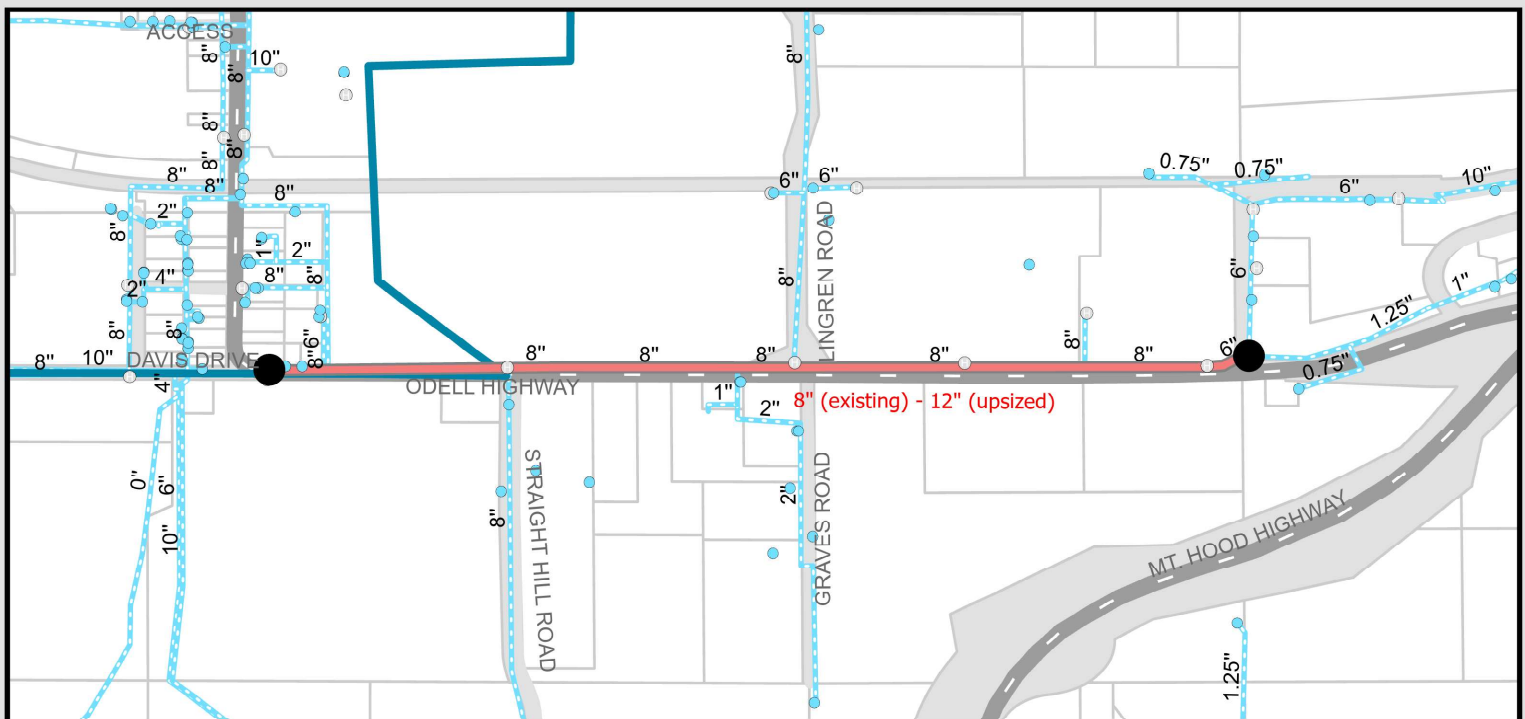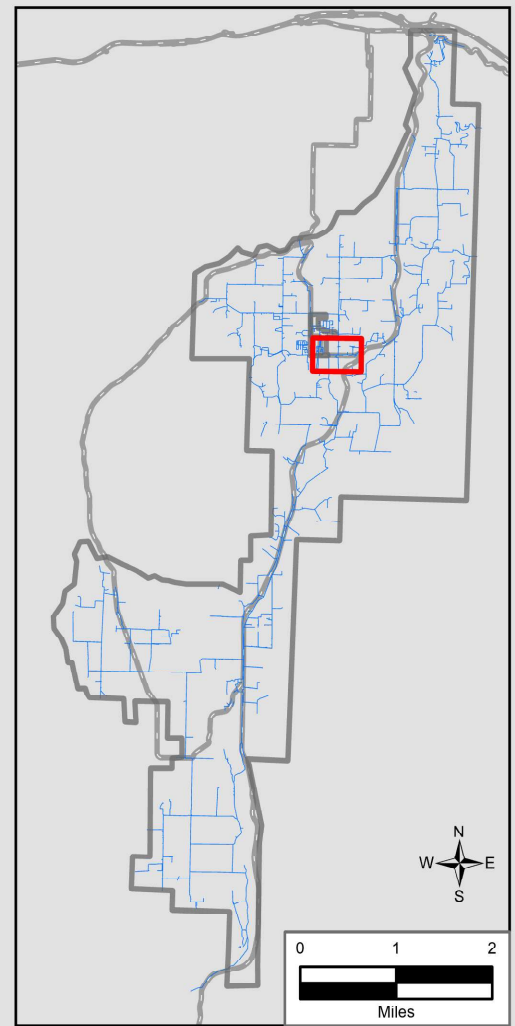

|                   |                      |                    |               |
|-------------------|----------------------|--------------------|---------------|
| Upsized Waterline | Relief Valve         | Crystal Spring     | Highway/Road  |
| New Waterline     | Hydrants             | Existing Waterline | Property line |
| New PRV           | Existing Reservoir   | District Boundary  | Water         |
| New Reservoir     | 0 250 500 1,000 Feet |                    |               |
| PRV Existing      |                      |                    |               |

Date: 8/27/2025

