



# CIP 18: Summit Drive - Lippman Road to the Hood River Intertie

**Project Cost: \$2,610,000**

**Project Priority: Medium**

## Project Description

Approximately 6,000 ft of 8-in water line will be installed on Summit Drive between Lippman Road and the Hood River Intertie to replace the existing 6-in water line. The upsized water line will improve fire flows, redundancy, and distribution capacity in the northwest quadrant of the Odell Pressure Zone, as well as allow for increased distribution between Hood River and Odell.

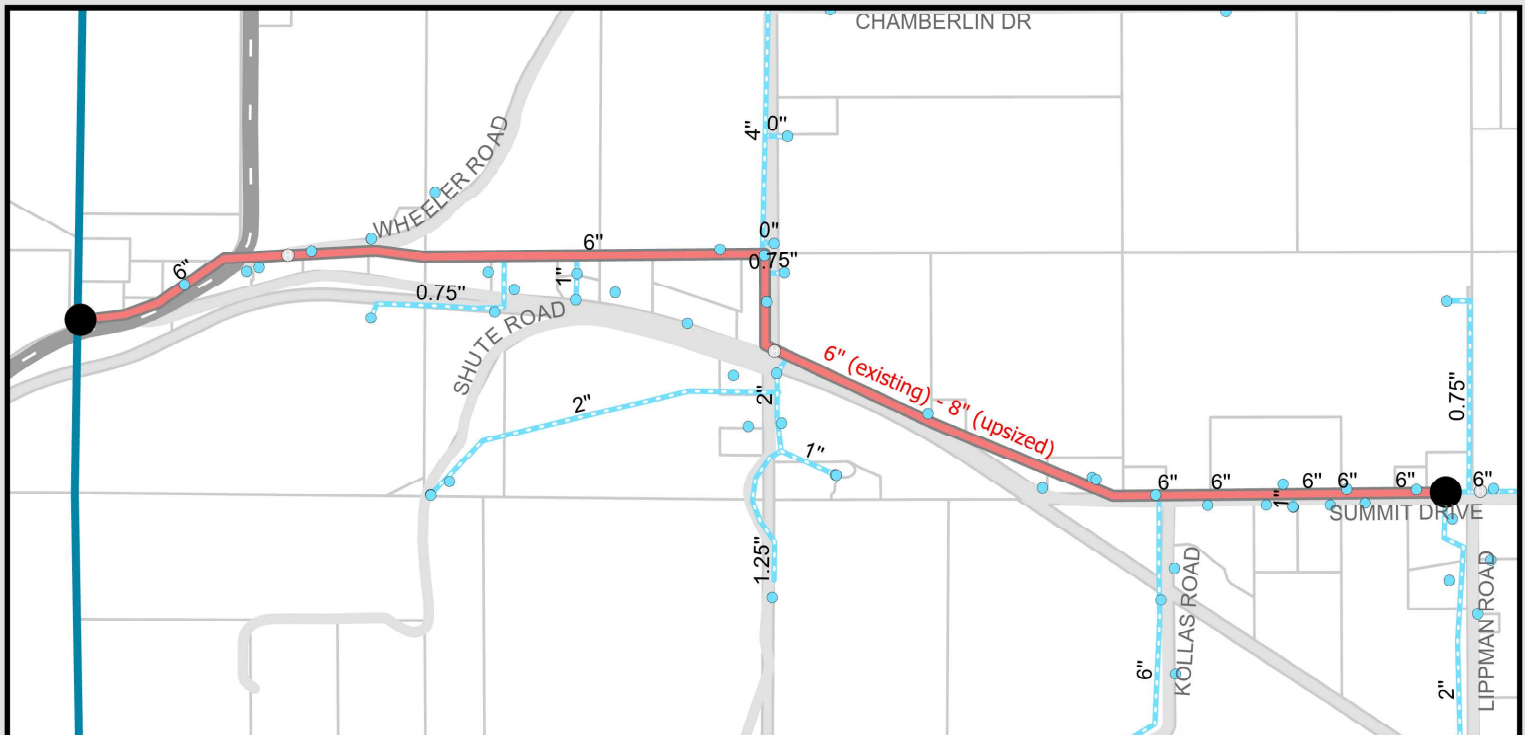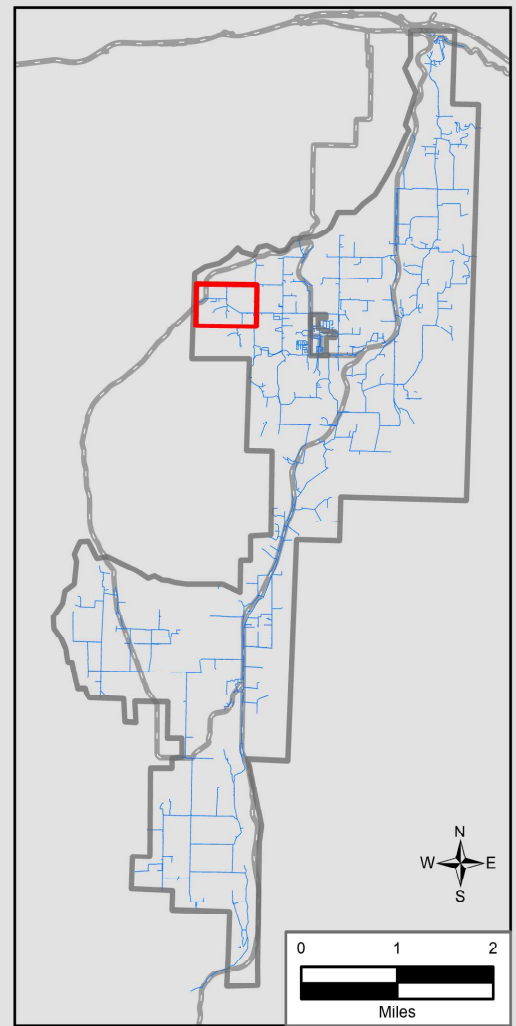

Upsized Waterline	Relief Valve	Crystal Spring	Highway/Road
New Waterline	Hydrants	Existing Reservoir	Property line
New PRV	Existing Reservoir	Existing Waterline	Water
New Reservoir		District Boundary	
PRV Existing			

Date: 8/27/2025

