



CIP 25: Fir Mountain Road and Wells Drive Water Line Replacement

Project Cost: \$3,200,000

Project Priority: Medium

Project Description

Starting on Fir Mountain Road, approximately 10,900 ft of 8-in water line will be installed, upsizing existing 4-in lines and providing new ways for water to reach Eastside Road via Fir Mountain Road. The replacement will start roughly 3,000 ft south of the intersection of Fir Mountain Road and Wells Drive and will end at two locations: the intersection of Fir Mountain Road and Eastside Road and at the existing 10-in water line that crosses Wells Drive from the Pine Grove Reservoir. The completion of this project will improve fire flows, distribution capacity, and redundancy within the Odell Pressure Zone and will install a new pipe in an area with known leaks.

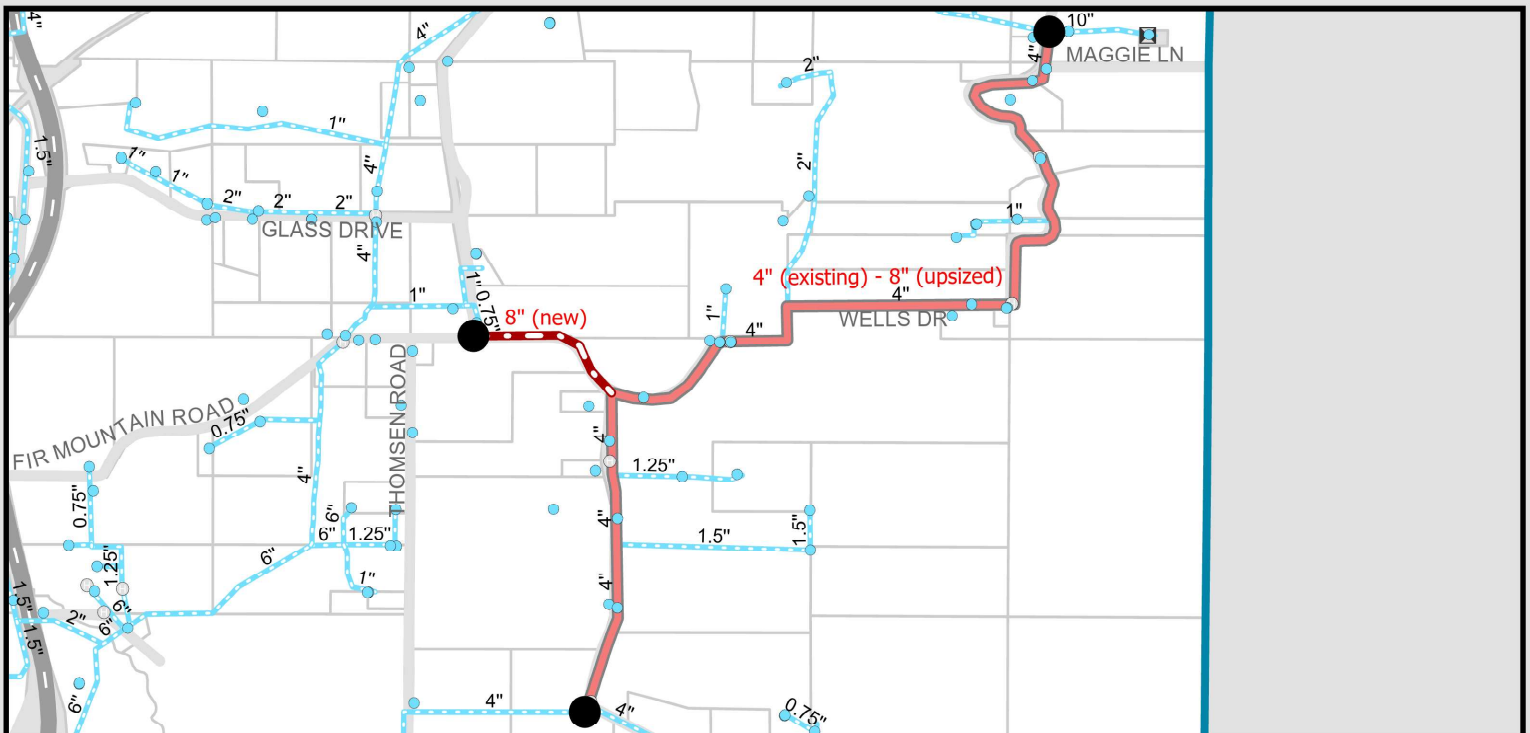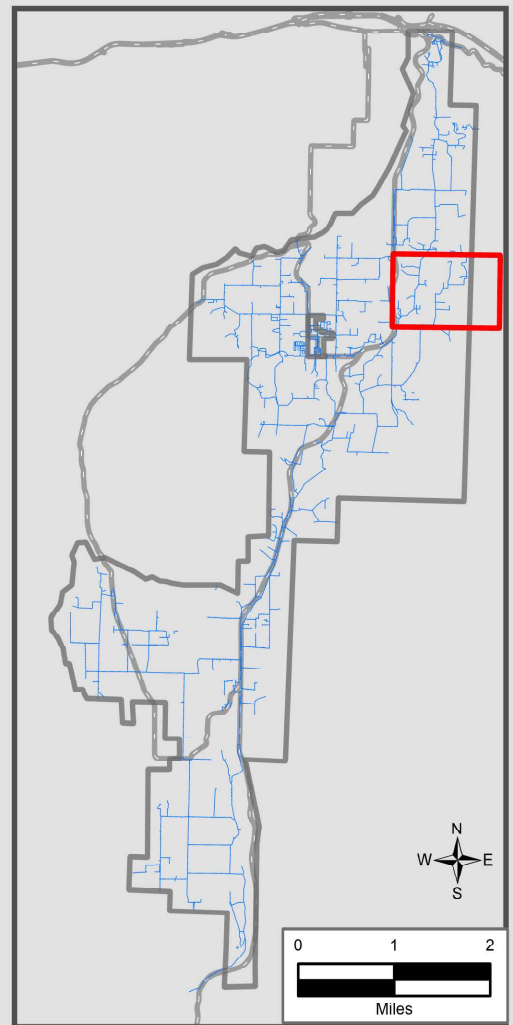

Upsized Waterline	Relief Valve	Crystal Spring	Highway/Road
New Waterline	Hydrants	Existing Waterline	Property line
New PRV	Existing Reservoir	Existing Waterline	Water
New Reservoir			District Boundary
PRV Existing			

0 1,000 2,000 4,000 Feet

Date: 8/28/2025