


CIP 3: Cooper Spur Road – Culbertson Drive to London Drive

Project Cost: \$2,305,500

Project Priority: Low

Project Description

Approximately 6,000 ft of 8-in water line will be installed to replace 5,300 ft of 4-in water line and 700 ft of 6-in water line on Cooper Spur Road, starting just south of London Drive (to connect to another 6-in line coming from the west) and running north before ending at the intersection of Culbertson Drive and Cooper Spur Road. The upsized water line will improve fire flows, redundancy, and distribution capacity in the south part of the District.

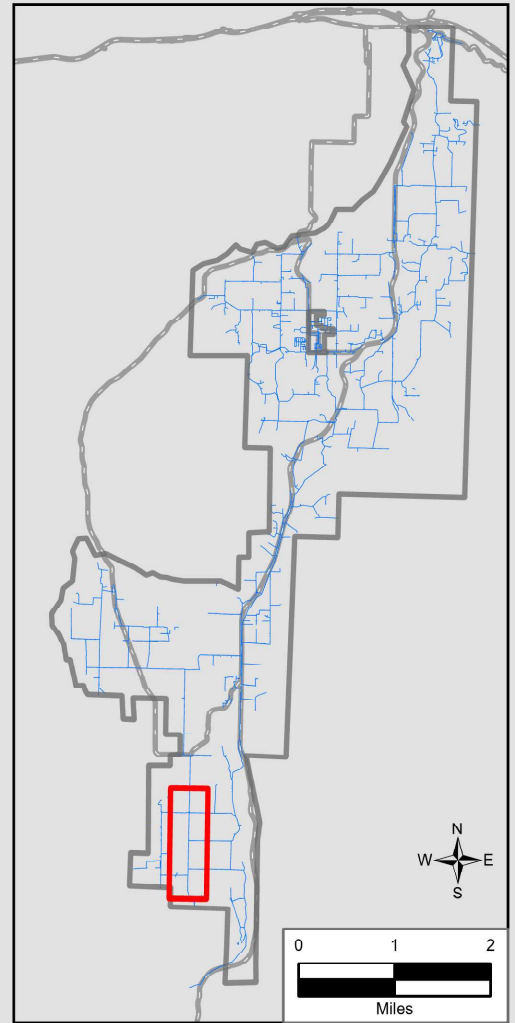

| | | | |
|-------------------|--------------------|--------------------|---------------|
| Upsized Waterline | Relief Valve | Crystal Spring | Highway/Road |
| New Waterline | Hydrants | Existing Waterline | Property line |
| New PRV | Existing Reservoir | Existing Waterline | Water |
| New Reservoir | | District Boundary | |
| PRV Existing | | | |

Date: 8/27/2025



Default Folder: P:\UK09\23\23817_CSWD_WMP\GIS\3_Cartographic\CIP Cut Sheets 2025\Crystal Springs 2025 CIP Map Figures