



CIP 6: Baseline Drive - Cooper Spur Road to Toll Bridge Road

Project Cost: \$3,534,375

Project Priority: Medium

Project Description

Approximately 7,500 ft of 12-in water line will be installed along Baseline Drive, starting at the existing 12-in water line at Baseline Drive and Toll Bridge Road and ending at the intertie with Parkdale near Cooper Spur. Of this 7,500 ft, 5,500ft of 12-in water line will replace existing 2-in, 4-in, and 6-in water line, and 2,000 ft of new 12-in water line will connect those two sections of pipe. The new water lines will improve fire flows, redundancy, and distribution capacity in the south part of the District and increase fire flow to Parkdale.

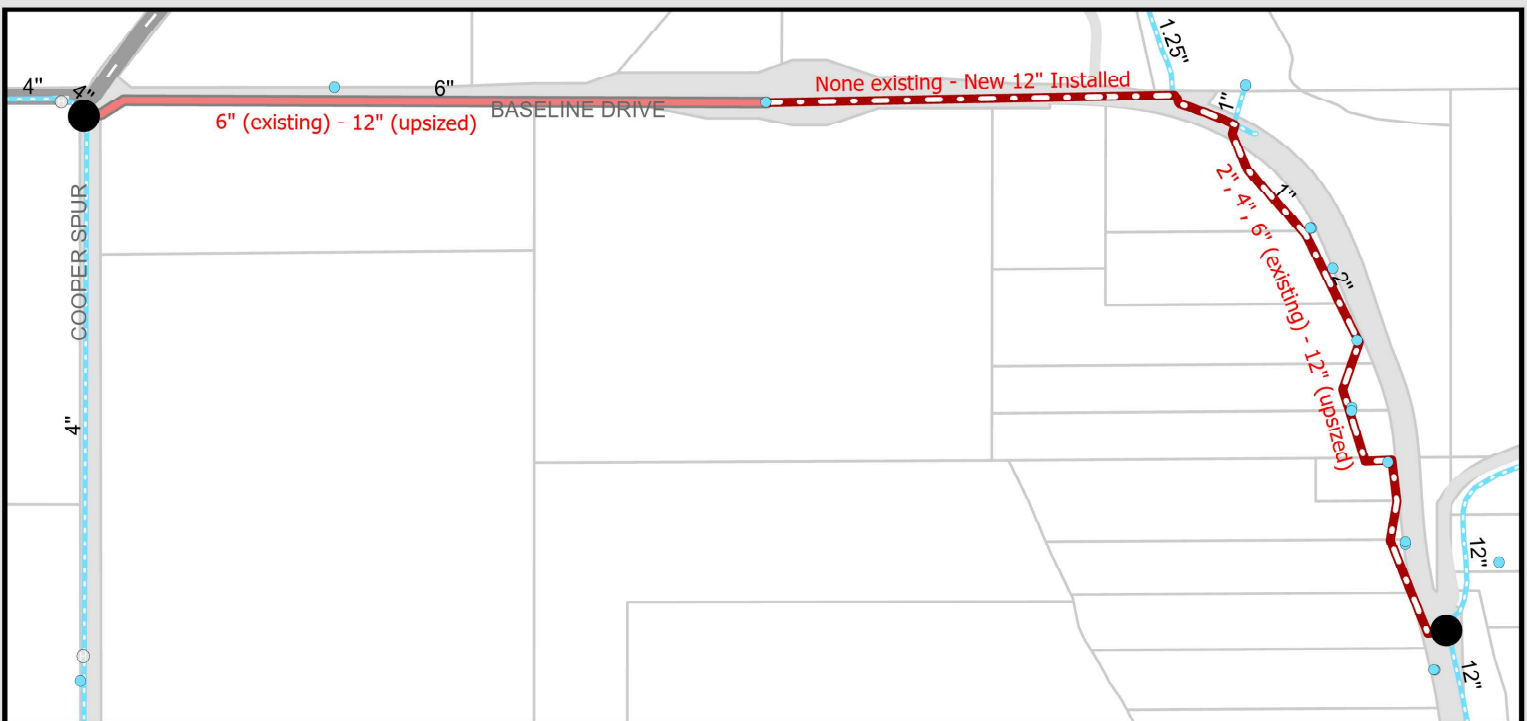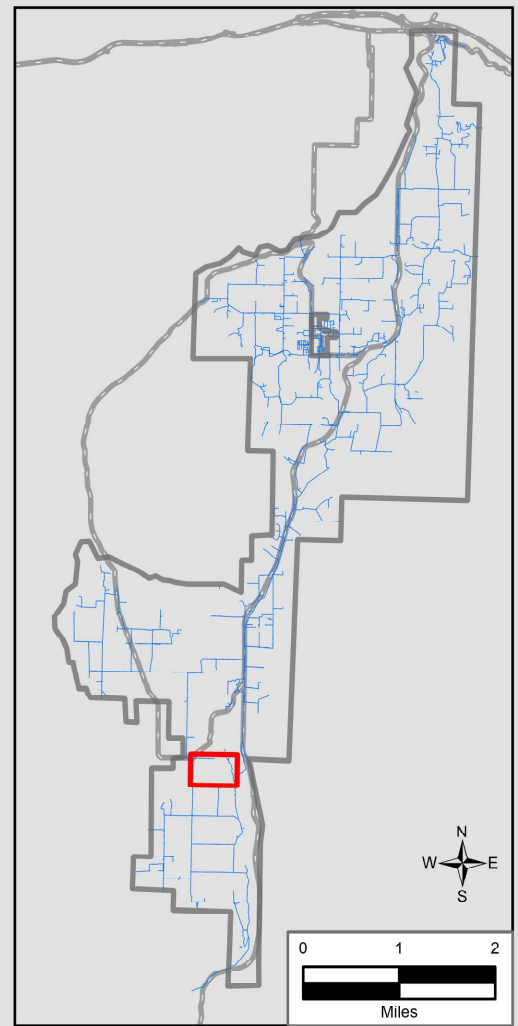

Upsized Waterline	Relief Valve	Crystal Spring	Highway/Road
New Waterline	Hydrants	Existing Waterline	Property line
New PRV	Existing Reservoir		Water
New Reservoir			District Boundary
PRV Existing			

Date: 8/27/2025