



CIP 7: Cooper Spur Road - South from Highway 35

Project Cost: \$1,196,250

Project Priority: Medium

Project Description

Approximately 2,750ft of new 8-in water main will be installed on Cooper Spur Road from an existing easement on the south end of 6765 Cooper Spur Road to the intersection of Cooper Spur and Highway 35 to add an additional loop to the Upper Hood Pressure Zone. This loop will supply increased flow and pressure to the north and south quadrants of the Upper Hood Pressure Zone.

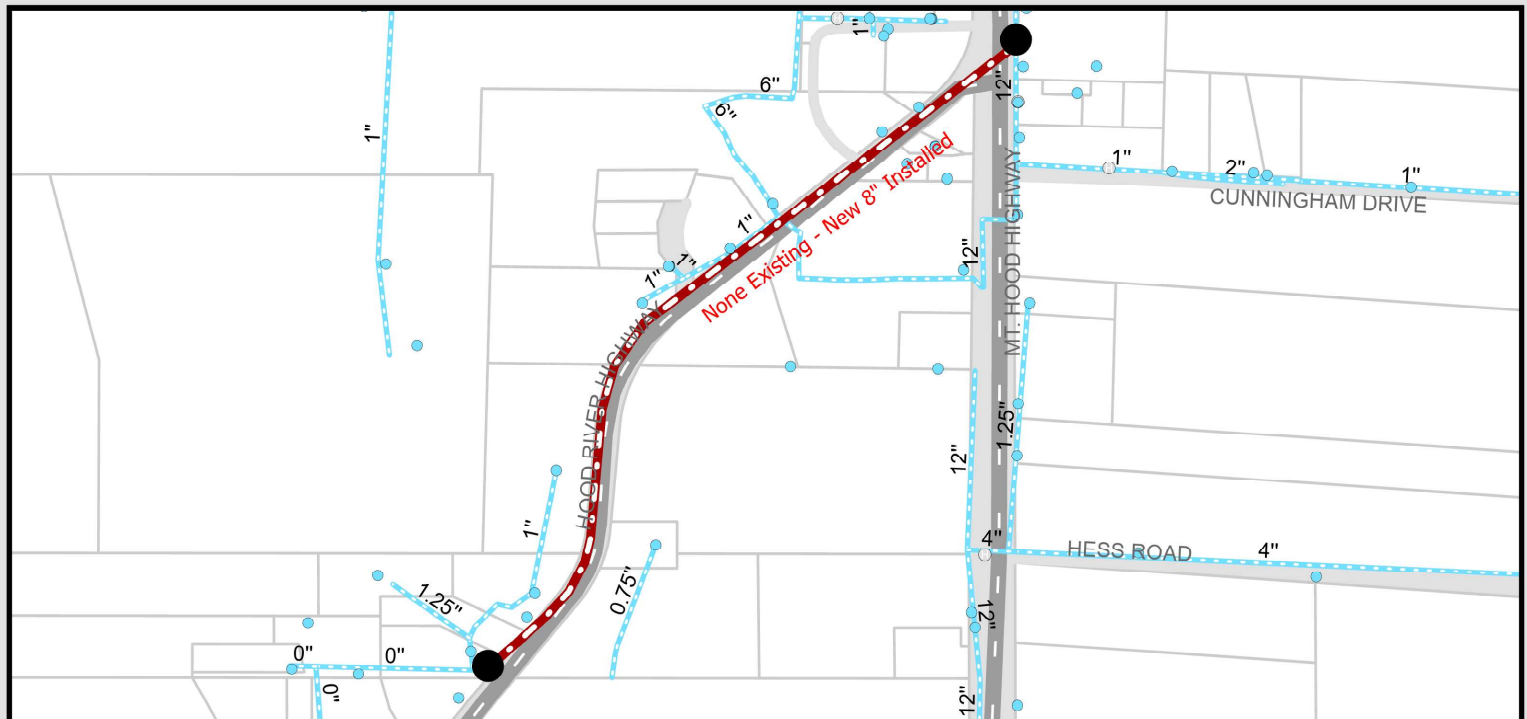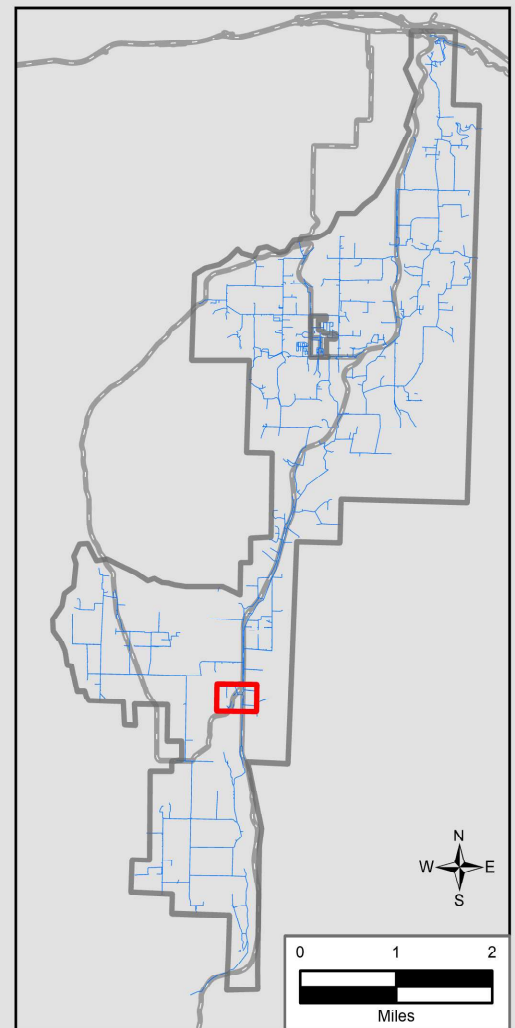

Upsized Waterline	Relief Valve	Crystal Spring	Highway/Road
New Waterline	Hydrants	Existing Reservoir	Property line
New PRV	Existing Reservoir	Existing Waterline	Water
New Reservoir	0 250 500 1,000 Feet	District Boundary	
PRV Existing			



Date: 8/27/2025



Default Folder: P:\KIP\23\23817_CSWD_VMP\GIS\3_Carographic\CIP Out Sheets\2025\Cystal Springs\2025 CIP Map Figures