



CIP 8: Allen Road - Woodworth Drive to Baseline Drive

Project Cost: \$3,480,000

Project Priority: Low

Project Description

Approximately 8,000 ft of 8-in diameter water line will be installed on Allen Road between Woodworth Drive and Baseline Drive to replace existing 4-in water line. The upsized waterline will improve overall pressures in the northwest quadrant of the Upper Hood Pressure Zone including maintaining pressure above 20psi in a fire and reducing fire flow velocities in the pipe.

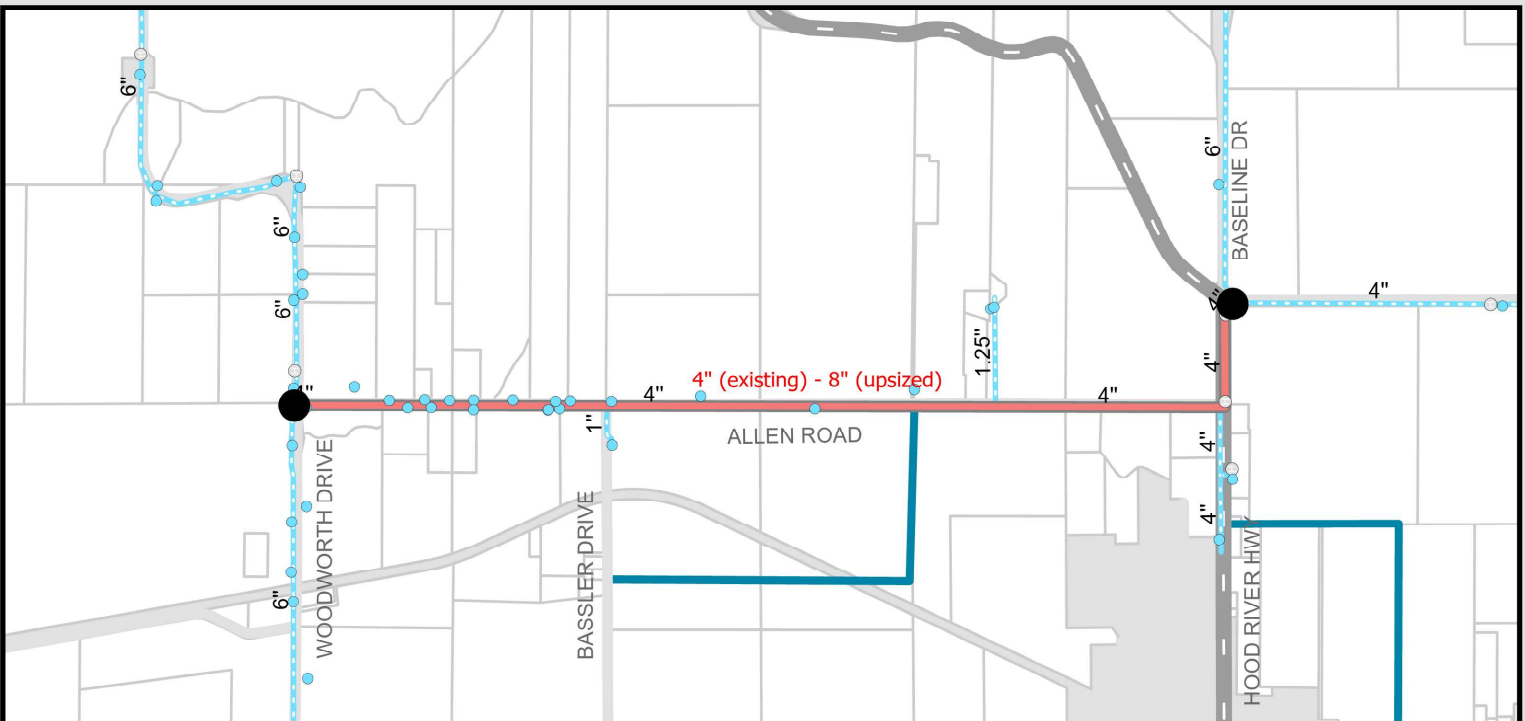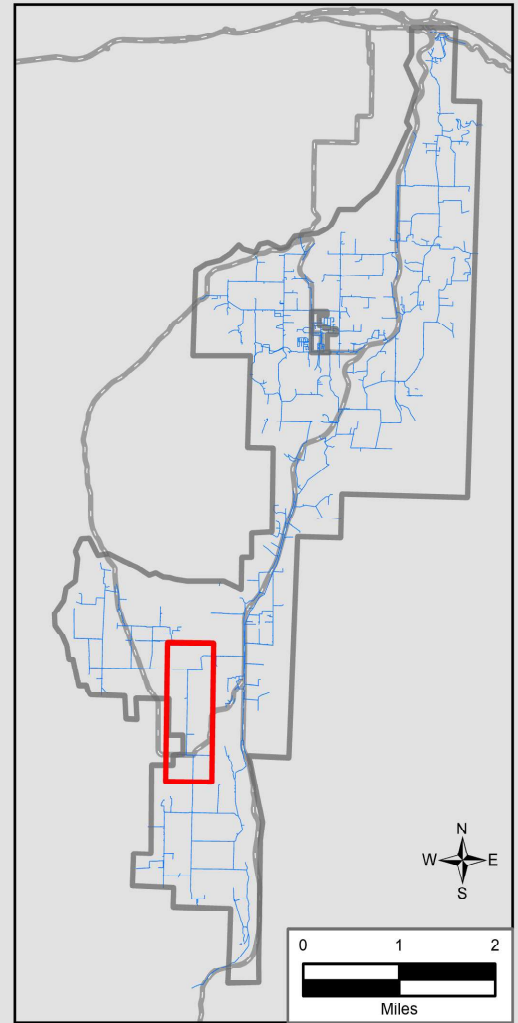

Upsized Waterline	Relief Valve	Crystal Spring	Highway/Road
New Waterline	Hydrants	Existing Waterline	Property line
New PRV	Existing Reservoir		Water
New Reservoir			District Boundary
PRV Existing			

0 500 1,000 2,000 Feet

Date: 8/27/2025