



# CIP 9: McCrum Drive to Berry Drive

**Project Cost: \$1,634,875**

**Project Priority: Medium**

## Project Description

Approximately 4,100ft of 6-in water line will be installed along McCrum Drive (starting at Trout Creek Ridge Road) to Berry Drive. Of this 4,100ft, approximately 3,450 ft will be upsizing existing 1-in and 2-in lines and approximately 650 ft will be entirely new. This water line will improve fire flows, redundancy, and distribution capacity in the northwest quadrant of the Upper Hood Pressure Zone.

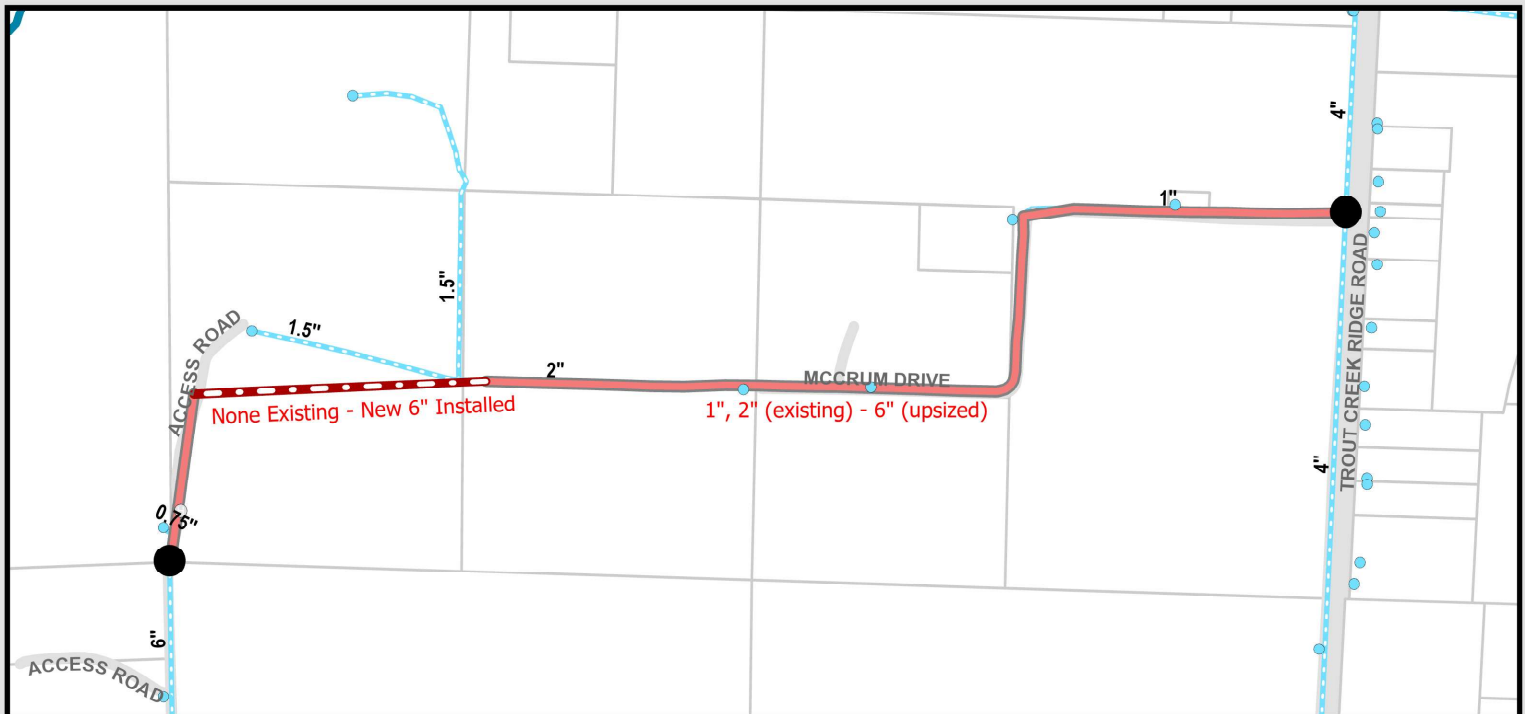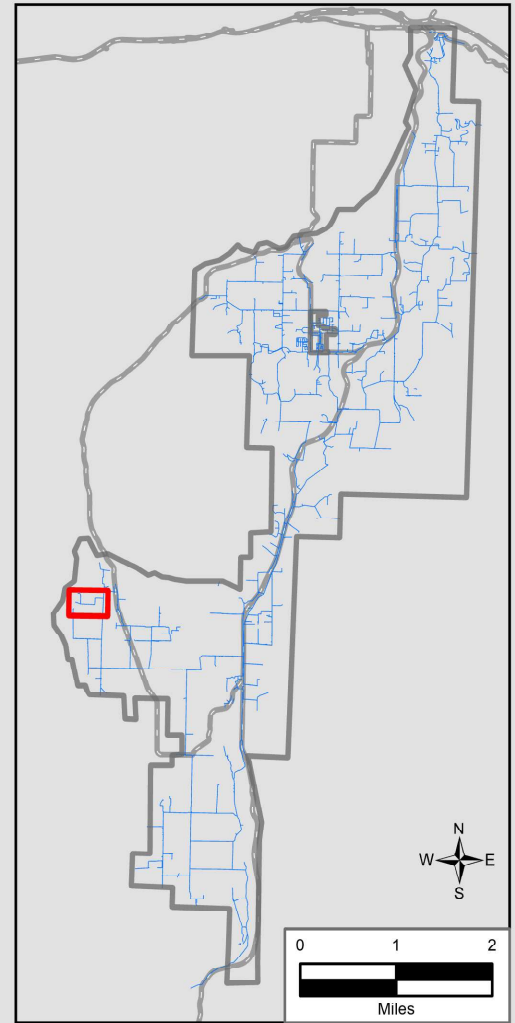

Upsized Waterline	Relief Valve	Crystal Spring	Highway/Road
New Waterline	Hydrants	Existing Reservoir	Property line
New PRV	Existing Reservoir	Existing Waterline	Water
New Reservoir	Existing Waterline	District Boundary	
PRV Existing	0 250 500 1,000 Feet		

Date: 8/28/2025